

# Amador Street Infrastructure Improvements



April 24, 2024

Prepared By:


Noel Aquino

Project Manager



# Background


- Built in the 1960's
- Services concrete batch plants, aggregate suppliers that support construction throughout SF and Disaster Response
- Existing infrastructure is beyond their useful life
- Roadway and pump station in disrepair
- Opportunities for enhancements

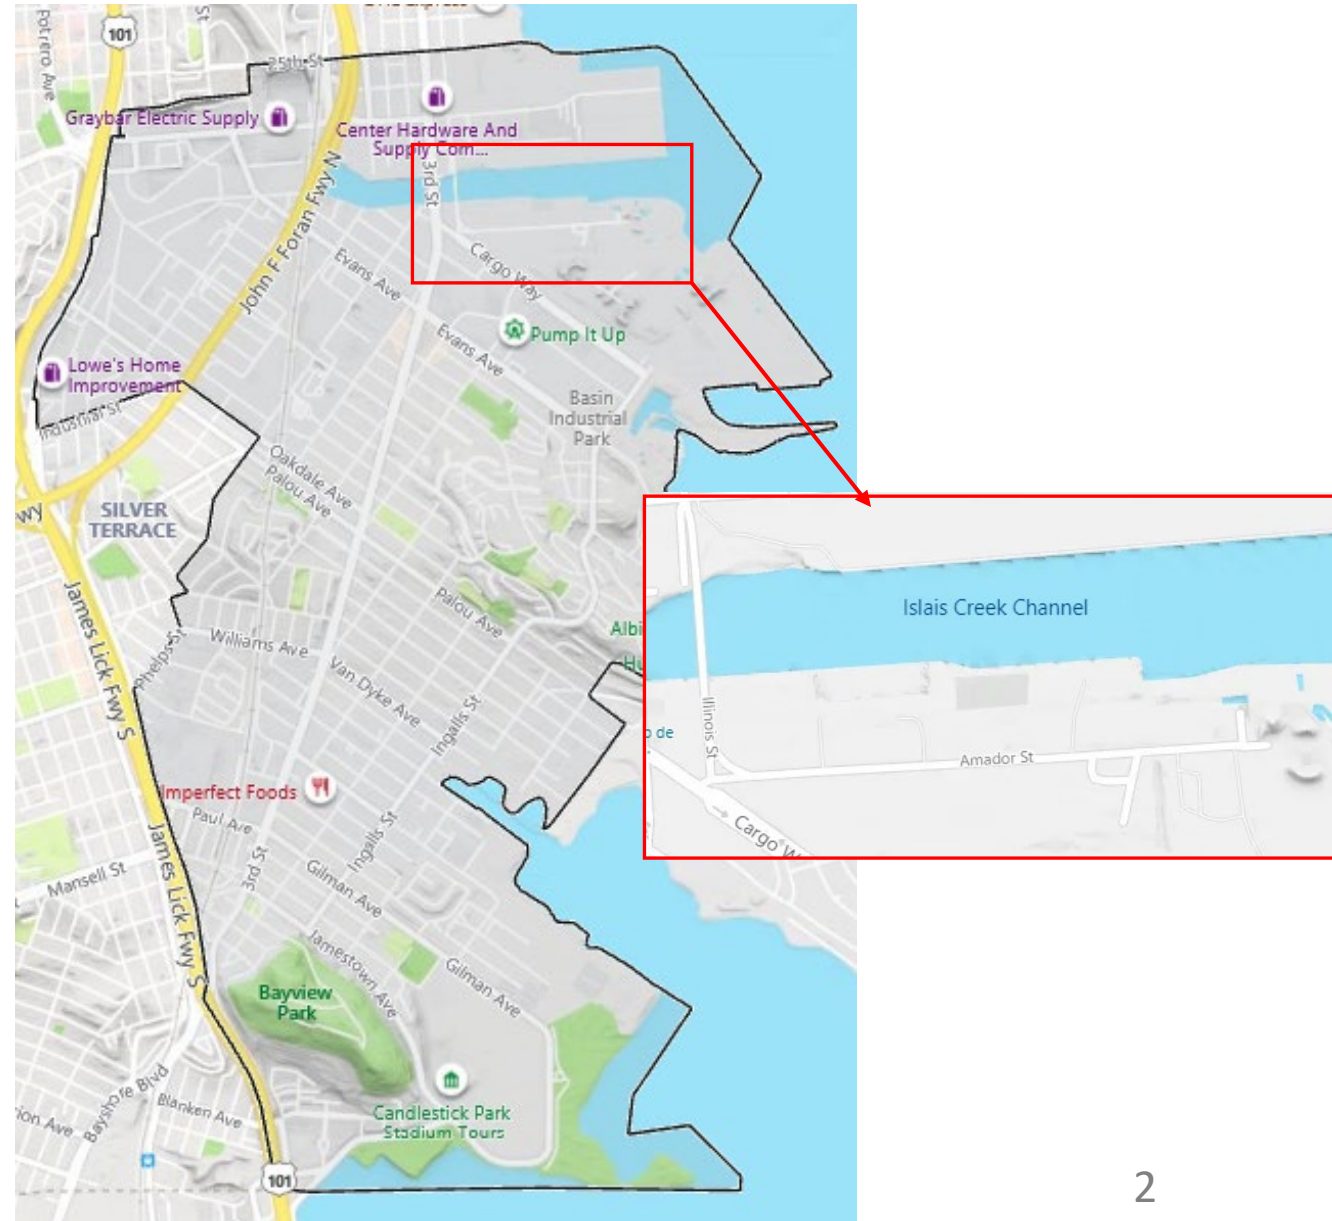

# Scope of Work: Utilities



# Scope of Work: Pump Station

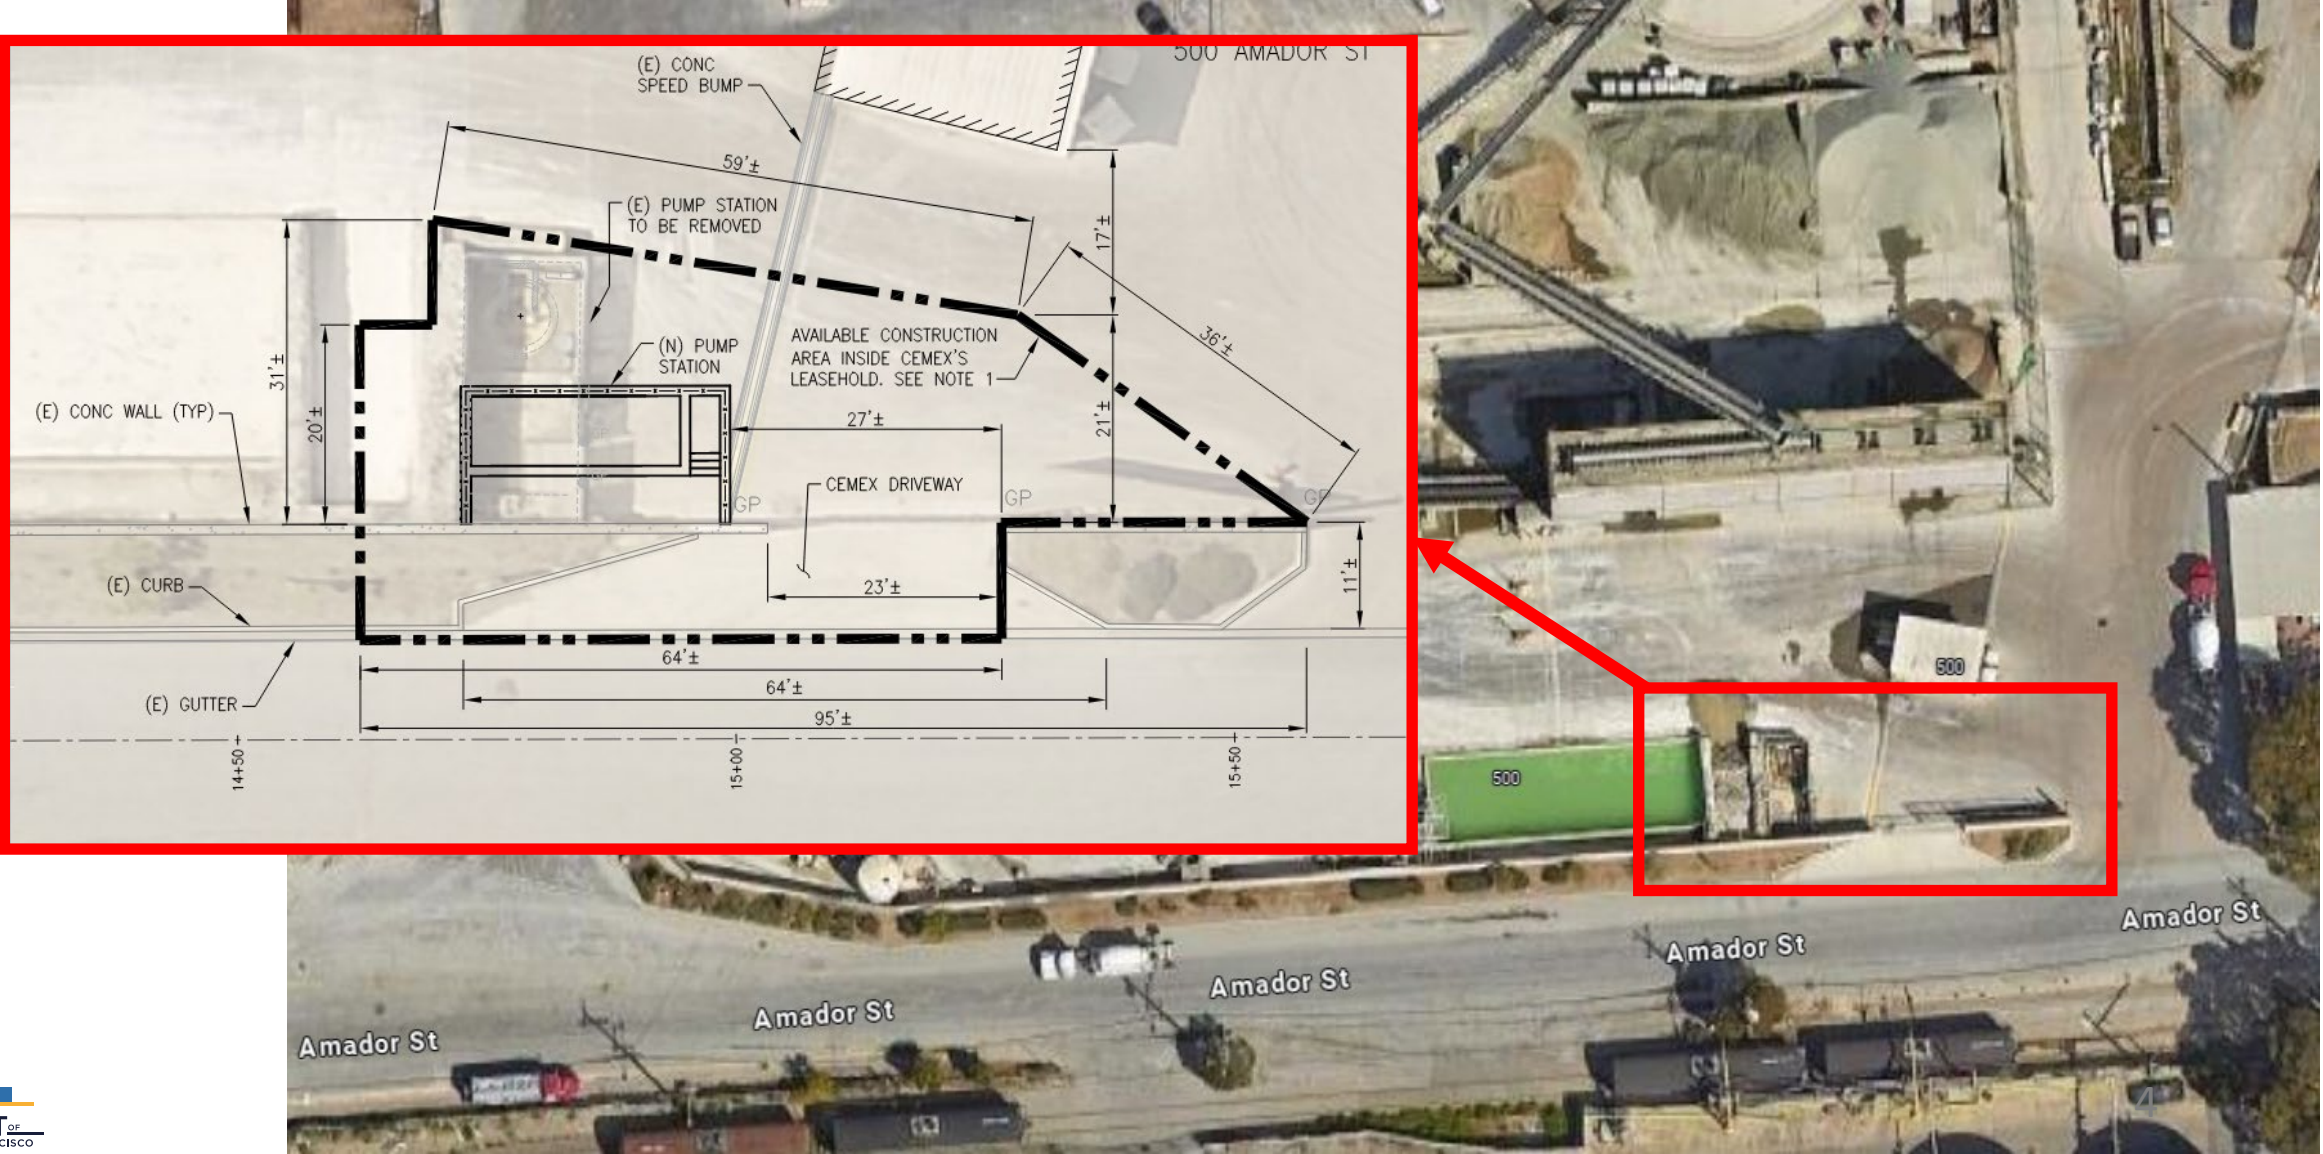

# Scope of Work: Roadway Reconstruction



Before








After




Roadway reconstruction limits

# Landscaping

	SAWCUT ASPHALT PAVING PER DIMENSIONS SHOWN. REMOVE & DISPOSE OF ASPHALT, BASEROCK & SOIL TO 36" DEPTH.		(E) UTILITY POLE TO REMAIN.
	SAWCUT CONCRETE GUTTER PER DIMENSIONS SHOWN. REMOVE & DISPOSE OF CONCRETE, BASEROCK & SOIL TO 42" DEPTH.		(E) STORMWATER INLET TO BE PROTECTED IN PLACE.
	(E) FENCE TO BE REMOVED.		

- REPORT CONFLICTS, OR INCONSISTENCIES BETWEEN NEW AND/OR EXISTING FACILITIES TO THE CITY REPRESENTATIVE. CONTRACTOR IS RESPONSIBLE FOR THE COORDINATION OF ALL PLUMBING AND ELECTRICAL ITEMS TO BE INSTALLED WORK.
- CLEAR AND REMOVE ALL MATTER, DEBRIS AND RUBBISH / LAYOUT AND DEMO DRAWING. CONTRACTOR SHALL DISPOSE LEGAL MANNER AS CONTRACTOR'S PROPERTY.
  - PROTECT ALL SITE ELEMENTS TO REMAIN.
  - ALL DEMOLITION WORK WITHIN DRIP LINE OF EXISTING TREE SHALL BE DONE BY HAND. CLEANLY CUT ANY ROOTS LARGER THAN 4" INCH DIAMETER. DO NOT TEAR ROOTS.

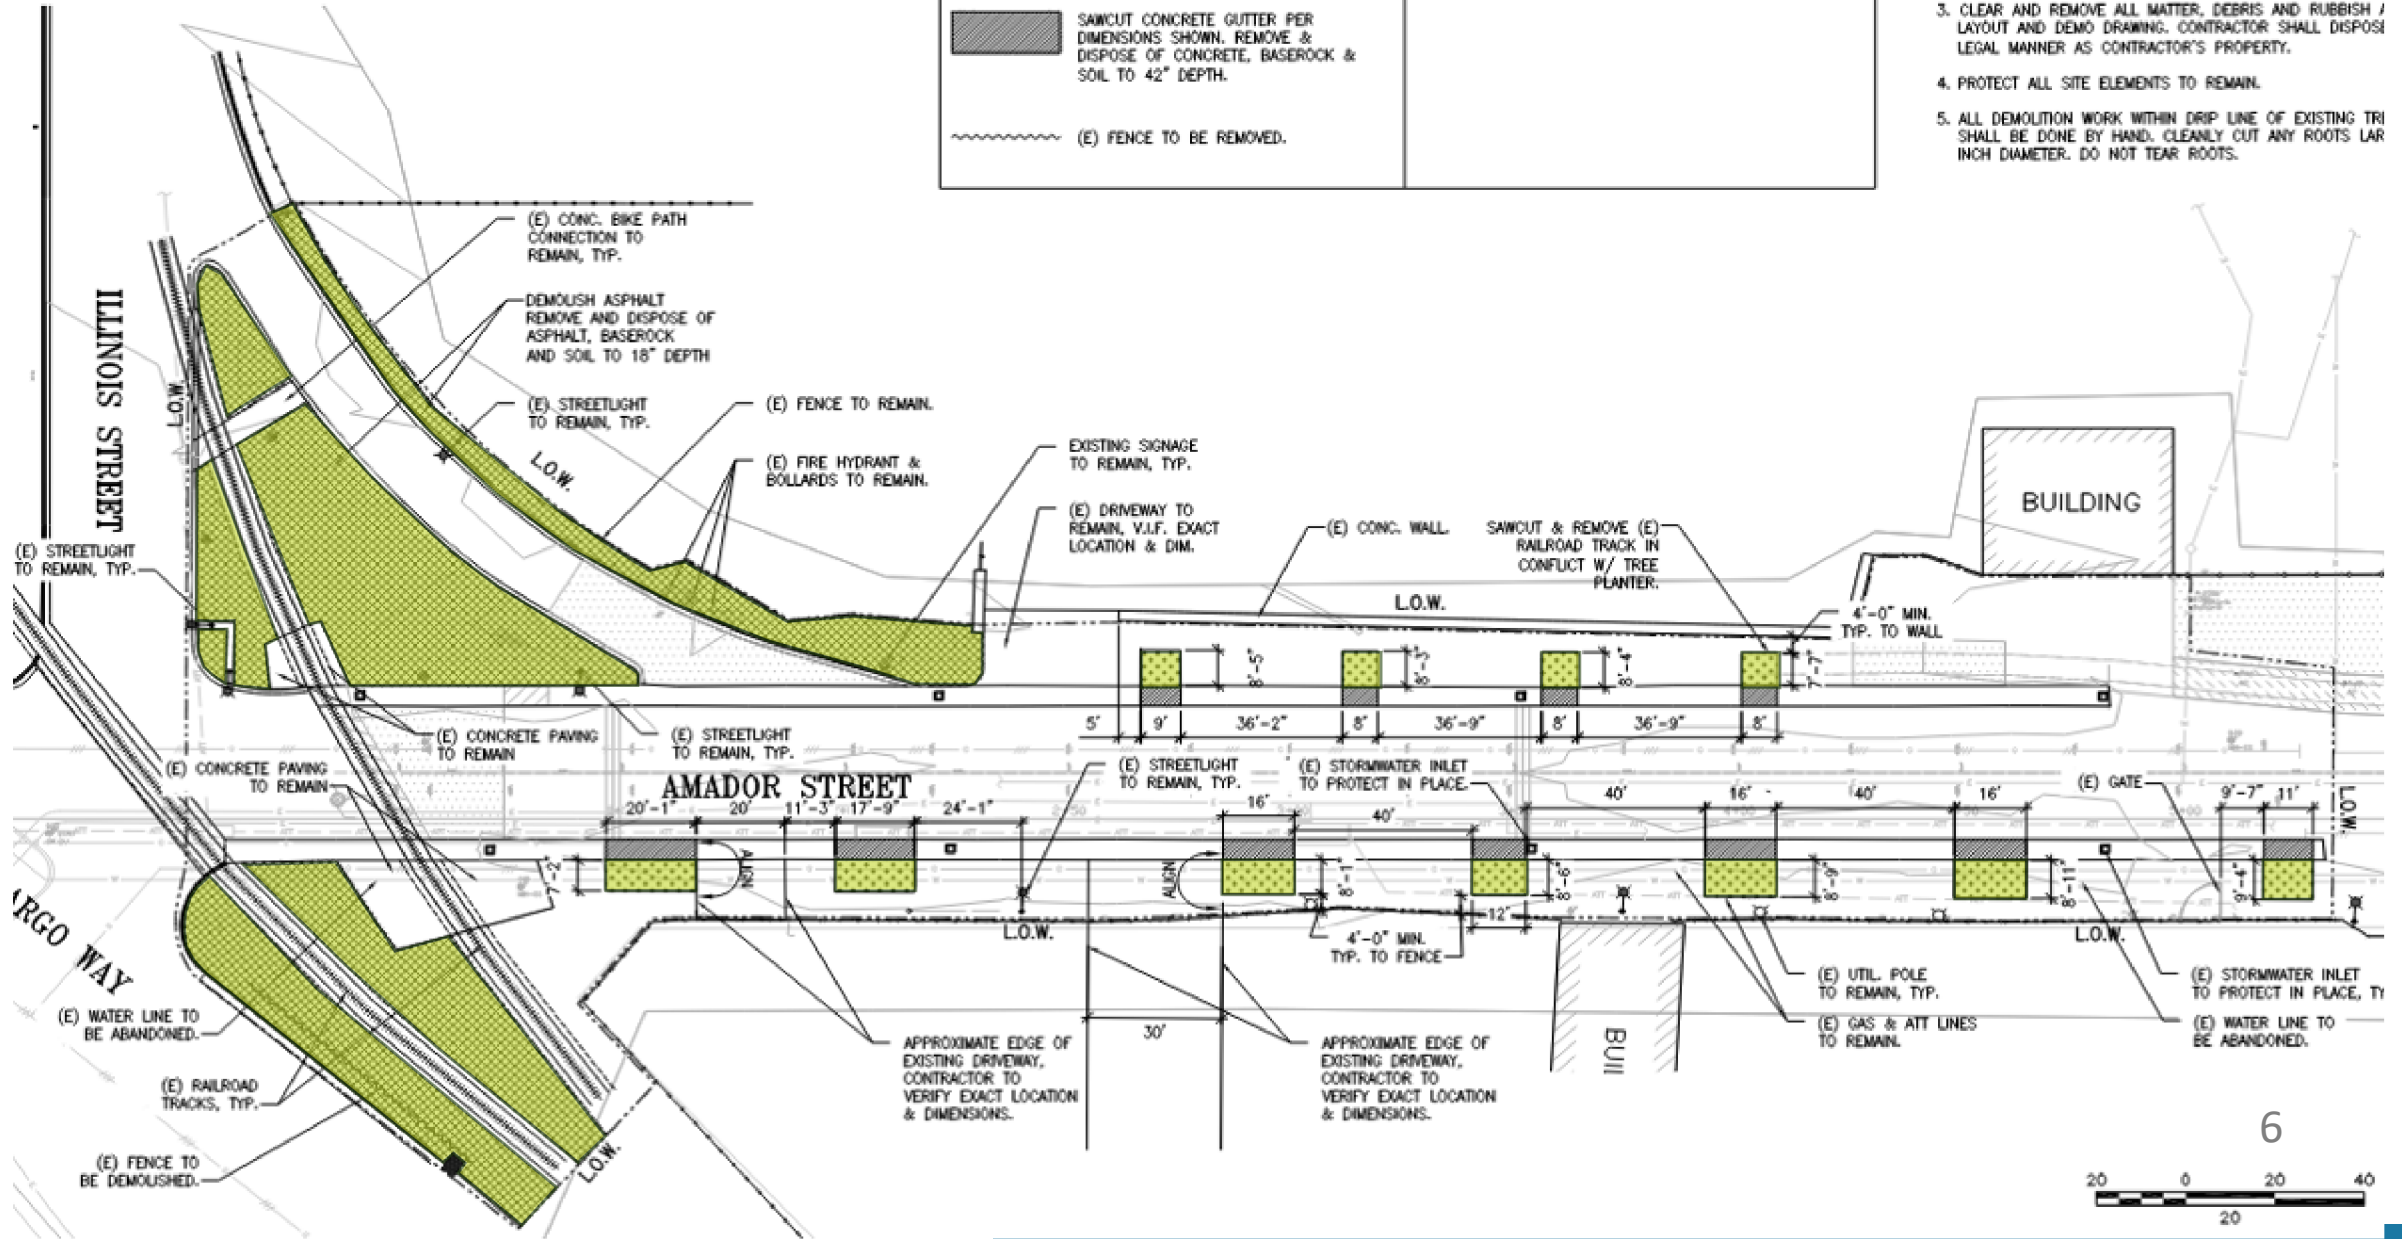

# Scope of Work: Landscaping Continued



Google

Before

# Scope of Work: Landscaping Continued



After



# Benefits:

- Enhanced Streetscape Landscaping
- Better for Local Truckers & Trucking Equipment
- Improved efficiency of Goods Movement
- Roadway Safety
- Bay Water Quality Benefits (stormwater)
- Local Jobs through DBE contracting goals
- Funded through Multiple Grants to support Maritime Cargo Operations

# Schedule

- Advertise – May 2024
- NTP – October 2024
- Fall 2024, Coordinate with Tenants and SFMTA on Traffic Plan
- Substantial completion – April 2026

# Questions?

